


FILTERED SHOWER HEAD

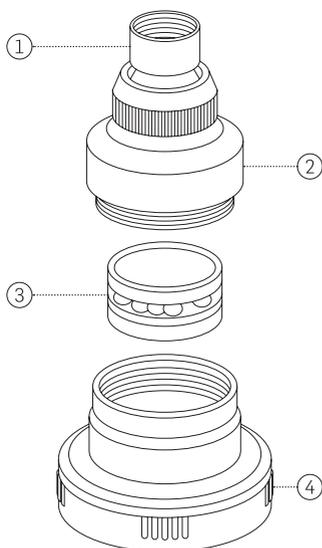

1. Brass Ball Joint
2. Metal Ring
3. Replaceable Filter
4. 3 Setting Toggle Switch

IMPORTANT SAFETY INFORMATION

CAUTION: UNIT WILL WITHSTAND WATER TEMPERATURE UP TO 80°C. DO NOT ATTEMPT TO USE BEYOND THE SUGGESTED TEMPERATURE.

WARNING: DO NOT USE IF UNIT IS CRACKED, MISSING PARTS, OR APPEARS TO BE BROKEN.

Important Instructions Before Use

1. Only use device for intended purposes.
2. Make sure to turn your shower to the off position, with the water at a safe temperature before removing or replacing your shower head.
3. Old shower head must be completely removed from shower arm before installing your new Filtered Shower Head.

Installing Your New Filtered Shower Head

1. Easy to install. No tools required.
2. Before installing your new shower head, be sure to clean any dirt, grime, and residue off the shower arm's screw threads.
3. After shower arm is cleaned, wrap Teflon tape around the screw threads 2-3 times.
4. Screw on your Filtered Shower Head firmly.

Tips For Operating Your Shower Head

1. The shower head has 3 settings: Rain, Massage, Combined. To switch between settings, use the toggle switch located on the side of the shower head.
2. The shower head filtration lasts 6-8 months

To Change Your Filter

- Unscrew the shower head by firmly grasping the metal ring and the base of the shower head and rotating until unit comes apart.
- Take out the filter and put a new one in its place.
- Screw the shower head back together

Caring Information

- If unit needs cleaning, wipe with damp cloth and try to remove as much debris from the holes as you can.

Technical Specifications

Dimensions	ø80x110mm
Weight	145g
Materials	ABS, stainless steel
Filter Media	ION ceramic balls
Working temperature	2°C-80°C